

LOC I-AHN <b>110.95</b>	APP CRS <b>274°</b>	Rwy Idg <b>6122</b>
		TDZE <b>813</b>
		Apt Elev <b>813</b>


# ILS or LOC/DME RWY 27

ATHENS/BEN EPPS (AHN)



**▼** Night landing: Rwy 2, 20 NA. DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME Required. VDP NA with Winder altimeter setting. When local altimeter setting not received, use Winder altimeter setting; increase DA to 1071 feet; increase all MDA 60 feet and S-LOC 27 visibility Cats C and D to 3/8 mile, and Circling Cat D visibility to 2 1/4 mile. For inop MALSIF, increase S-LOC 27 all Cats visibility to 1 mile. For inop MALSIF when using Winder altimeter setting, increase S-ILS 27 all Cats visibility to 3/8 mile and increase S-LOC 27 Cats A and B visibility to 1 mile, and Cats C and D to 1 1/8 mile.

**MISSED APPROACH:**  
Climb to 1500 then climbing left turn to 2500 on heading 060° and AHN VOR/DME R-092 to VESTO INT/AHN 23.6 DME and hold.

ASOS <b>132.875</b>	ATLANTA APP CON * <b>132.475 291.1</b>	ATHENS TOWER * <b>126.3 (CTAF) 0 338.275</b>	GND CON <b>121.8</b>	CLNC DEL <b>132.475 291.1</b> (when tower closed)	UNICOM <b>122.95</b>
------------------------	---	---	-------------------------	---	-------------------------

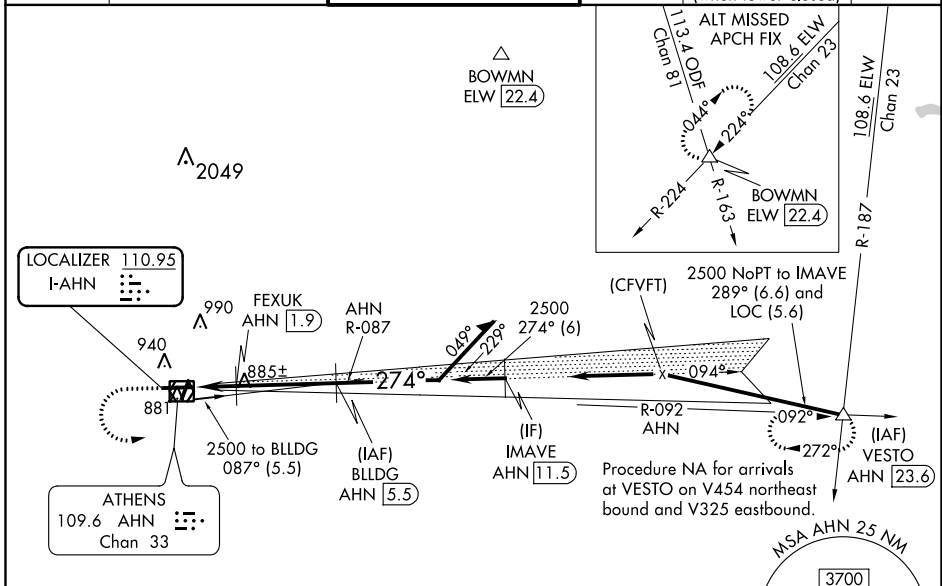

ELEV <b>813</b>	TDZE <b>813</b>
-----------------	-----------------

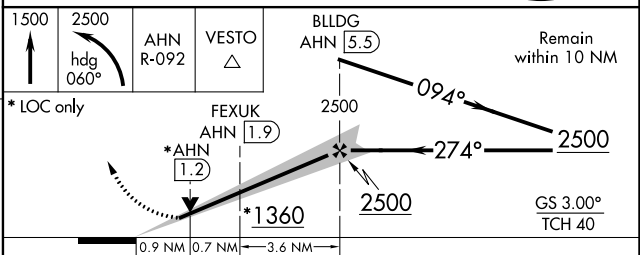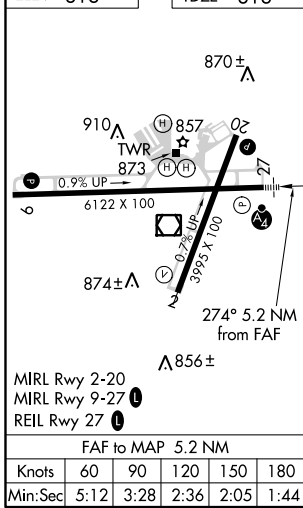

CATEGORY	A	B	C	D
S-ILS 27		1013-3/4	200 (200-3/4)	
S-LOC 27		1140-3/4	327 (400-3/4)	
<b>CIRCLING</b>	1260-1 447 (500-1)	1280-1 467 (500-1)	1320-1 1/2 507 (600-1 1/2)	1460-2 647 (700-2)