LOC I-SPI	APP CRS	Rwy Idg	7927
109.5	043°	TDZE	592
		Apt Elev	598

ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

T A ASR — When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. ADF REQUIRED.
*RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold.

ATIS	SPRINGFIELD APP CON ★	SPRINGFIELD TOWER ★	GND CON	CLNC DEL	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) L 257.8	121.9 348.6	121.7	122.95



ADF or DME REQUIRED

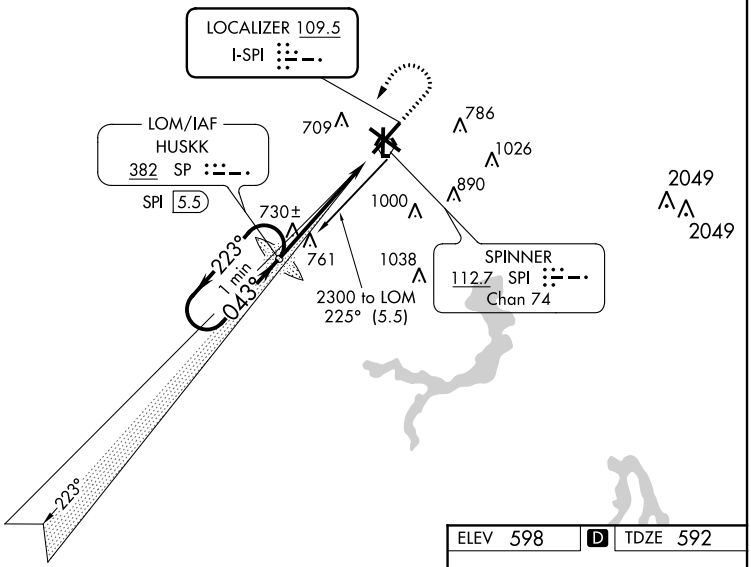

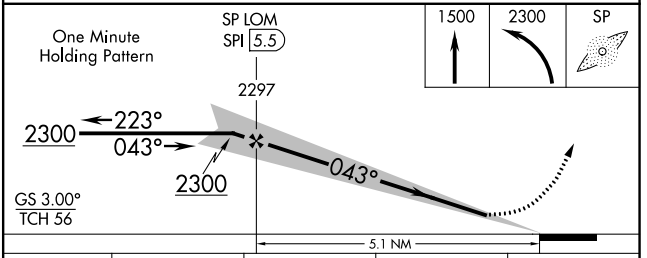

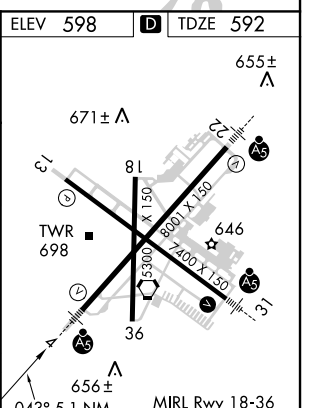

MIRL Rwy 18-36
REIL Rwy 13 L
HIRL Rwys 4-22 and 13-31 L

CATEGORY	A	B	C	D
S-ILS 4	*792/24 200 (200-½)			
S-LOC 4	1020/24 428 (500-½)		1020/40 428 (500-¾)	
C CIRCLING	1040-1 442 (500-1)		1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

EC-3, 09 NOV 2017 to 07 DEC 2017
EC-3, 09 NOV 2017 to 07 DEC 2017