




| | | | |
|--|------------------------|-----------------------------|---|
| VORTAC SPI 112.7 Chan 74 | APP CRS 216° | Rwy Idg TDZE Apt Elev | 8001 598 598 |
|--|------------------------|-----------------------------|---|

VOR/DME RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

| | | | |
|-----------------------------|---|--------------------|--|
| ▽ ▲ ASR | When local altimeter setting not received, use Lincoln altimeter setting and increase all MDAs 60 feet and increase Cats C/D and Circling Cat C visibility ¼ mile. VDP NA when using Lincoln altimeter setting. | MALSR AS | MISSED APPROACH: Climb to 2200 via SPI R-216 then right turn direct SPI VORTAC and hold. |
|-----------------------------|---|--------------------|--|

| | | | | | |
|-----------------------------|--|--|-------------------------------|--------------------------|-------------------------|
| ATIS 127.65 270.1 | SPRINGFIELD APP CON * 126.15 323.0 | SPRINGFIELD TOWER * 121.3 (CTAF) 257.8 | GND CON 121.9 348.6 | CLNC DEL 121.7 | UNICOM 122.95 |
|-----------------------------|--|--|-------------------------------|--------------------------|-------------------------|

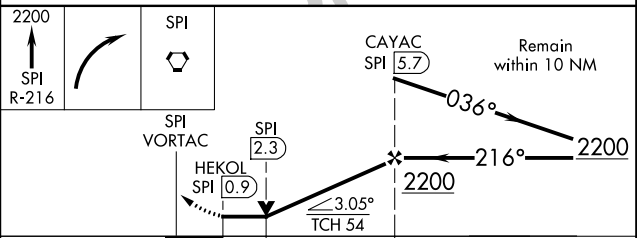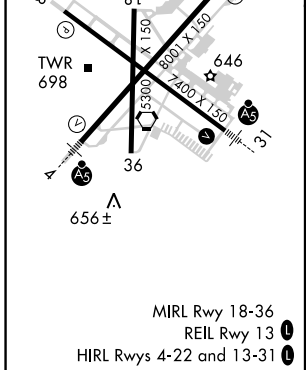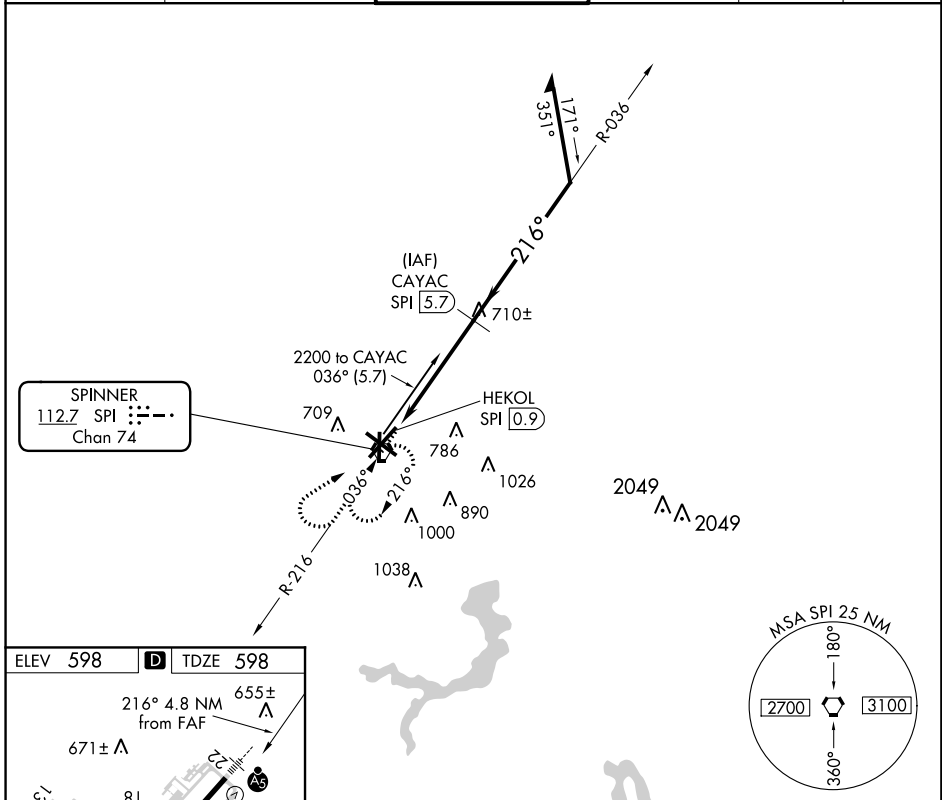

| CATEGORY | A | B | C | D |
|----------|--------|-------------|-------------------------|-----------------------|
| S-22 | 1100-½ | 502 (500-½) | 1100-1 | 502 (500-1) |
| CIRCLING | 1160-1 | 562 (600-1) | 1160-1½ 562 (600-1½) | 1200-2 602 (700-2) |