




| | | | |
|-----------------------|------------------------|-----------------------------|-------------------------------------------|
| NDB COQ 335 | APP CRS 009° | Rwy Idg TDZE Apt Elev | 4002 1279 1279 |
|-----------------------|------------------------|-----------------------------|-------------------------------------------|

NDB RWY 35
CLOQUET CARLTON COUNTY (COQ)

NA When local altimeter setting not received, use Duluth Intl altimeter setting and increase all MDA 60 feet; increase S-35 and Circling Cat C visibility 1/8 mile. Inoperative table does not apply to S-35 Cat A/B. For inoperative ODALS, increase S-35 Cat C visibility to 1 3/4 mile. For inoperative ODALS when using Duluth Intl altimeter setting increase S-35 Cat C visibility to 1 1/8 mile. Night Landing: Rwy 7, 25 NA.

ODALS MISSED APPROACH: Climb to 2300 then climbing left turn to 3000 direct COQ NDB and hold, continue climb-in-hold to 3000.

| | | | |
|--------------------------|---------------------------------------|---------------------------|-------------------------------|
| AWOS-3 118.525 | DULUTH APP CON 125.45 233.7 | CLNC DEL 122.15 | UNICOM 122.8 (CTAF) |
|--------------------------|---------------------------------------|---------------------------|-------------------------------|

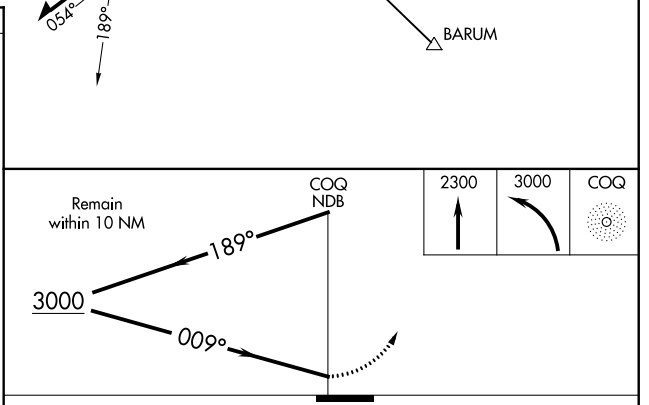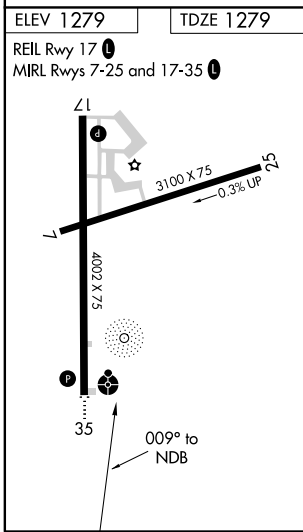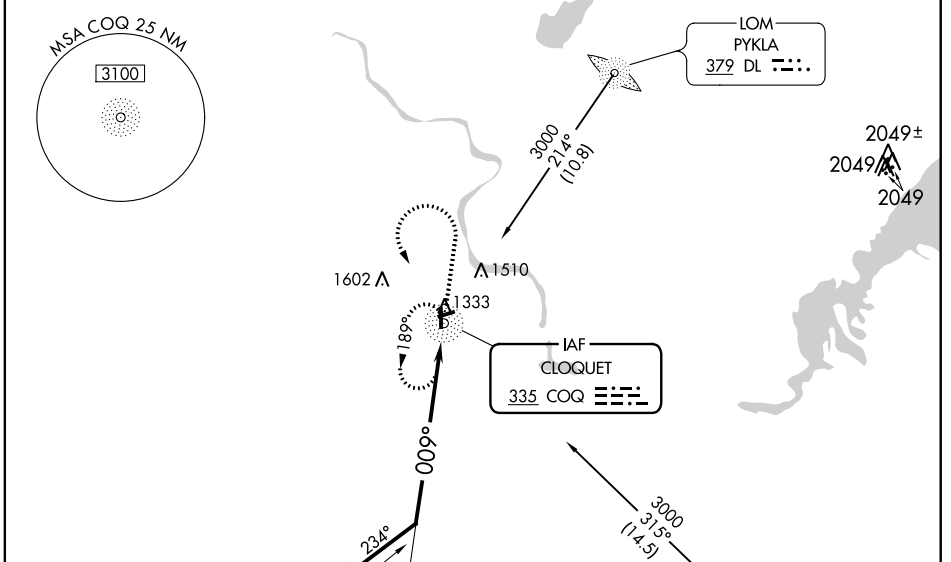

| CATEGORY | A | B | C | D |
|----------|--------|-------------|-------------------------------|----|
| S-35 | 1860-1 | 581 (600-1) | 1860-1 1/8 581 (600-1 1/8) | NA |
| CIRCLING | 1860-1 | 581 (600-1) | 1860-1 1/4 581 (600-1 1/4) | NA |

NC-1, 09 NOV 2017 to 07 DEC 2017

NC-1, 09 NOV 2017 to 07 DEC 2017