

WAAS CH 45905 W22A	APP CRS 215°	Rwy Idg TDZE 26 Apt Elev 26	7193
--	------------------------	---	-------------


RNAV (GPS) RWY 22

PUNTA GORDA (PGD)



⚠ Baro-VNAV NA when using Page Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Page Field altimeter setting and increase LPV DA to 276, LPV visibility 1/8 SM, LNAV/VNAV DA to 360, LNAV/VNAV visibility 1/8 SM; increase LNAV MDA to 440, LNAV C/D visibility 1/8 SM; increase all Circling MDAs 60 feet, and Circling C/D visibility 1/4 SM.

MISSED APPROACH:
Climb to 2000 direct BULOW and hold.

ASOS 135.675	FORT MYERS APP CON ★ 125.15 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	FORT MYERS CLNC DEL 127.05 (when tower closed)	CLNC DEL 119.55	UNICOM 122.975
------------------------	---	--	--------------------------	---	---------------------------	--------------------------

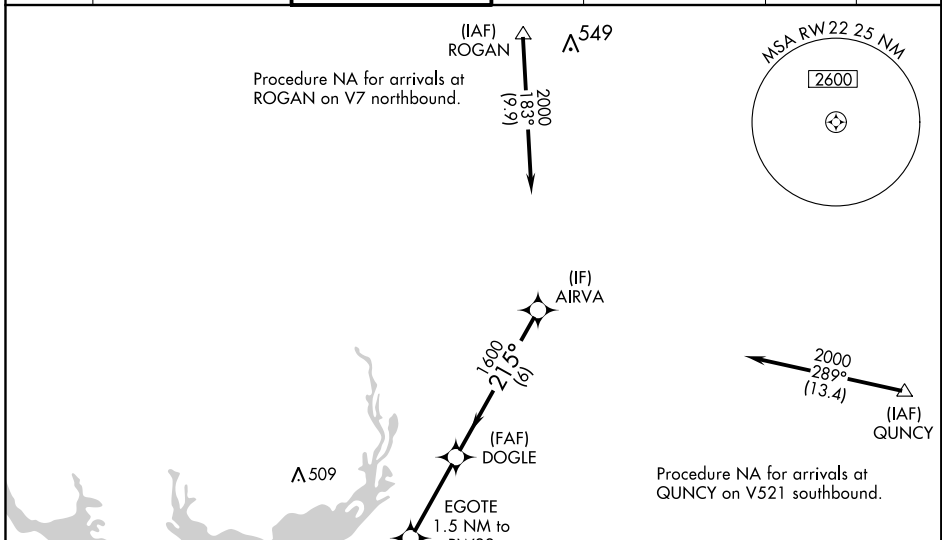

ELEV 26	D	TDZE 26
---------	----------	---------

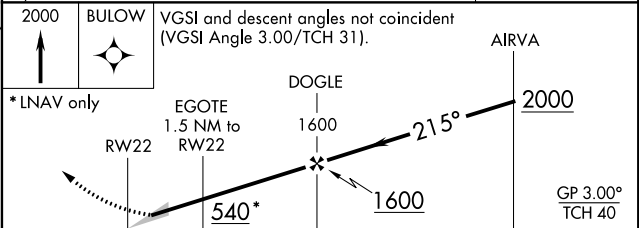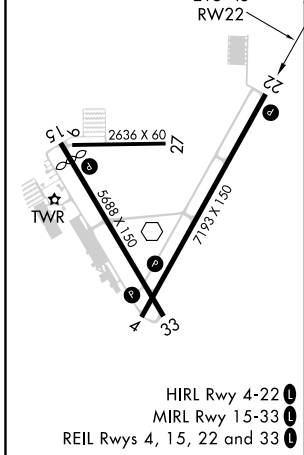

CATEGORY	A	B	C	D
LPV DA		226-3/4	200 (200-3/4)	
LNAV/VNAV DA		310-1	284 (300-1)	
LNAV MDA		380-1	354 (400-1)	
CIRCLING	440-1	580-1	600-1 1/2	740-2 1/4
	414 (500-1)	554 (600-1)	574 (600-1 1/2)	714 (800-2 1/4)