


WAAS CH <b>90229</b> W35A	APP CRS <b>355°</b>	Rwy Idg <b>12250</b> TDZE <b>496</b> Apt Elev <b>542</b>
---------------------------------	------------------------	--


# RNAV (GPS) Y RWY 35L

AUSTIN-BERGSTROM INTL (AUS)


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. DME/DME RNP-0.3 NA. For mop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½ SM, and LNAV Cat E visibility to 1¼ SM. \*\*RVR 1800 authorized with use of FD or AP or HUD to DA.

**MALSR**  
 MISSED APPROACH: Climb to 1700 then climbing left turn to 3500 direct GARDS and hold.


D-ATIS <b>124.4</b>	AUSTIN APP CON <b>127.225 317.65 (EAST)</b> <b>120.875 270.25 (SOUTH)</b> <b>119.0 370.85 (WEST)</b>	AUSTIN TOWER <b>121.0 281.5</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>125.5 263.0</b>	CPDLC
------------------------	---	------------------------------------	-------------------------------	--------------------------------	-------

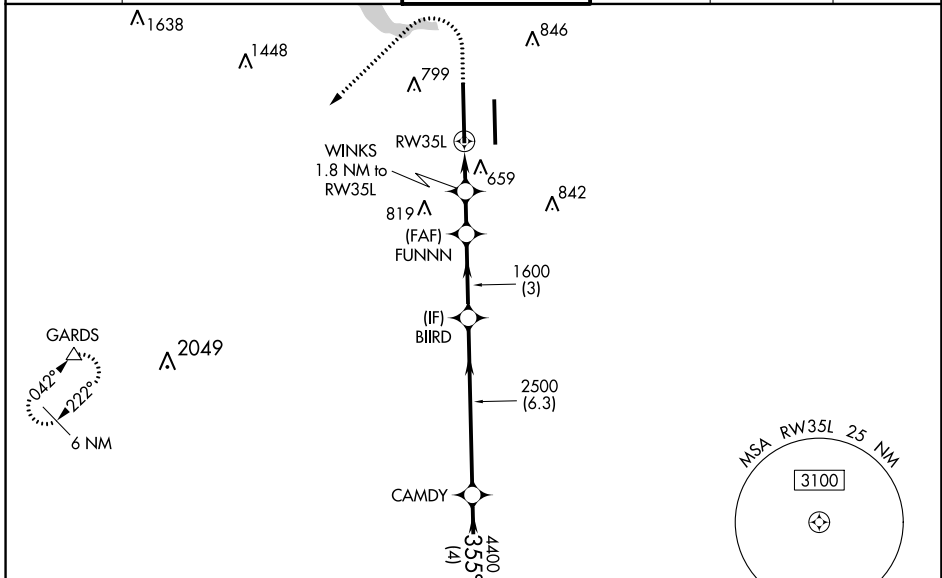

ELEV <b>542</b>	<b>D</b>	TDZE <b>496</b>
-----------------	----------	-----------------

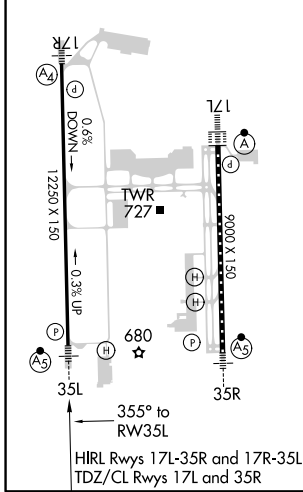

1700	3500	GARDS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).
------	------	-------	--

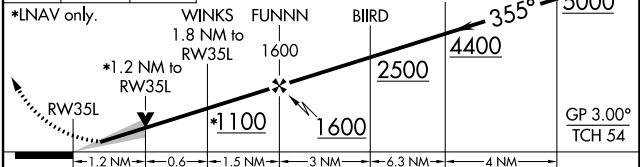

CATEGORY	A	B	C	D	E
LPV DA **	696/24		200 (200-½)		
LNAV/VNAV DA	972/60		476 (500-1¼)		
LNAV MDA	920/24	424 (400-½)	920/40		424 (400-¾)
<b>C</b> CIRCLING	1040-1 498 (500-1)	1100-1 558 (600-1)	1200-1¾ 658 (700-1¾)	1200-2 658 (700-2)	1520-3 978 (1000-3)