LOC/DME I-MYF	APP CRS	Rwy Idg	3401
111.95	281°	TDZE	423
Chan 56(Y)		Apt Elev	427

ILS or LOC RWY 28R

MONTGOMERY-GIBBS EXECUTIVE (MYF)

DME or RADAR required. VDP NA with San Diego Intl altimeter setting. When local altimeter setting not received, use San Diego Intl altimeter setting and increase all DA 71 feet and all MDA 80 feet. For inoperative MALSR when using San Diego Intl altimeter setting, increase S-ILS 28R all Cats visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 via heading 270° and MZB VORTAC R-326 to CARIF INT/MZB 16.3 DME and hold.

ATIS	SOCAL APP CON	MONTGOMERY TOWER*	GND CON	CLNC DEL	SAN DIEGO RADIO
126.9	124.35 279.625	119.2 (CTAF) 269.4	118.22	123.725	122.4

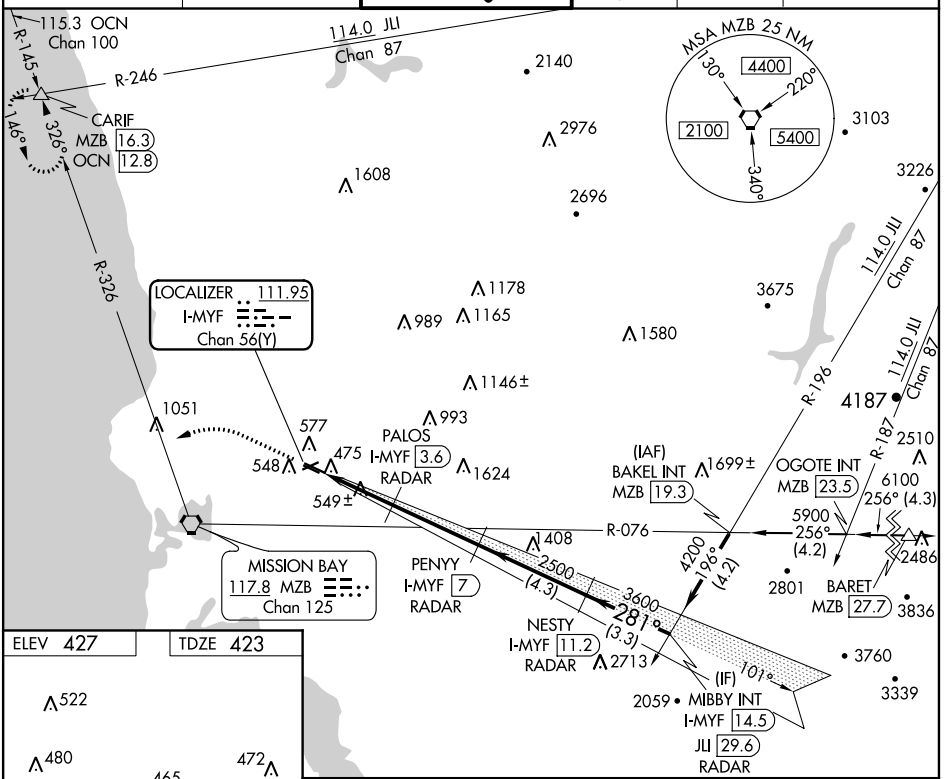

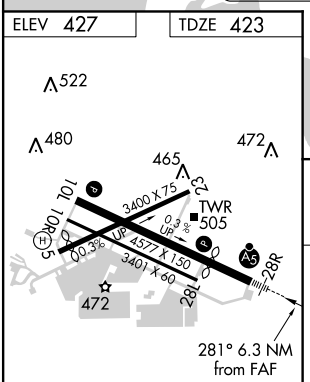

REIL Rwy 28L
MIRL Rwy 10L-28R

FAF to MAP 6.3 NM					
Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06

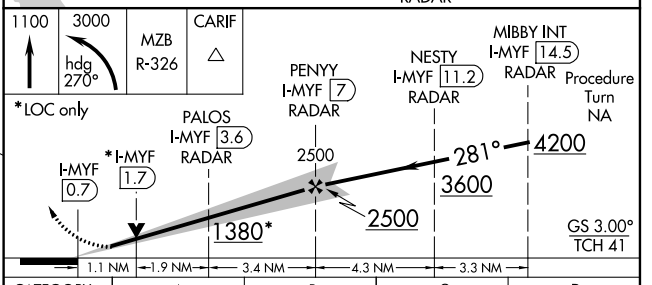

CATEGORY	A	B	C	D
S-ILS 28R	623-½ 200 (200-½)		NA	
S-LOC 28R	800-½ 377 (400-½)		NA	
CIRCLING	880-1 453 (500-1)		NA	

SW-3, 04 JAN 2018 to 01 FEB 2018
SW-3, 04 JAN 2018 to 01 FEB 2018