

(CWARD2.CWARD) 17341


CWARD TWO DEPARTURE (RNAV)

AL-6667 (FAA)

RAMONA (RNM)
RAMONA, CALIFORNIA

ATIS
132.025
RAMONA TOWER ★
119.875
SOCAL DEP CON
119.6 363.1

**TOP ALTITUDE:
AS ASSIGNED BY ATC**

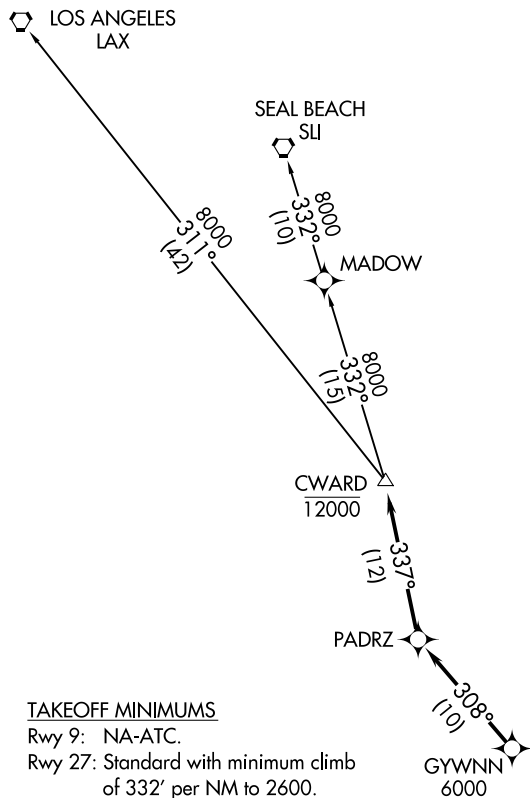

- NOTE: RADAR required.
- NOTE: RNAV 1.
- NOTE: GPS or DME/DME/IRU required.
- NOTE: Turbojet and turboprop only.
- NOTE: Tower En Route control only.

TAKEOFF MINIMUMS

Rwy 9: NA-ATC.
 Rwy 27: Standard with minimum climb
 of 332' per NM to 2600.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 27: Climb heading 268° to 2600, expect vectors to cross GYWNN at or above 6000, then on track 308° to PADRZ, then on track 337° to cross CWARD at or below 12000, thence. . . .

. . . .on transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

LOS ANGELES TRANSITION (CWARD2.LAX)

SEAL BEACH TRANSITION (CWARD2.SLI)

CWARD TWO DEPARTURE (RNAV)

(CWARD2.CWARD) 07DEC17

RAMONA, CALIFORNIA
RAMONA (RNM)

SW-3, 04 JAN 2018 to 01 FEB 2018

SW-3, 04 JAN 2018 to 01 FEB 2018