


LOC I-TVR 109.7	APP CRS 357°	Rwy Idg 5002 TDZE 86 Apt Elev 86
---------------------------	------------------------	---

ILS or LOC RWY 36

VICKSBURG TALLULAH RGNL (TVR)


NA	ADF required. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting and increase S-ILS 36 DA to 309 feet; increase all MDA 40 feet and visibility Cats C and D ¼ mile.	SSALR 	MISSED APPROACH: Climb to 1000 then climbing left turn to 2100 direct TKH NDB and hold.
-----------	--	-----------	---

ASOS 118.525	MEMPHIS CENTER 132.5 259.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

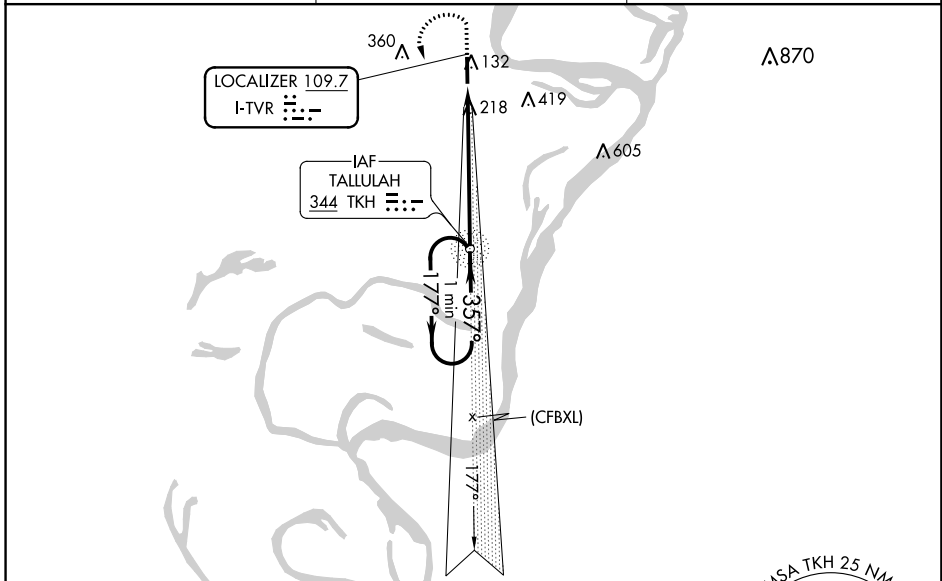

ADF REQUIRED

ELEV 86	D	TDZE 86			
REIL Rwy 18	MIRL Rwy 18-36	36 357° 6 NM from FAF			
FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

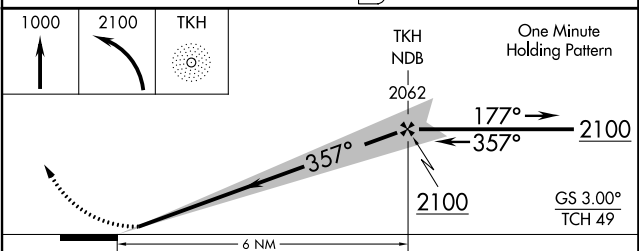

CATEGORY	A	B	C	D
S-ILS 36	286-½		200 (200-½)	
S-LOC 36	540-½	454 (500-½)	540-⅞	454 (500-⅞)
C CIRCLING	540-1	454 (500-1)	720-1¾ 634 (700-1¾)	720-2 634 (700-2)

SC-4, 04 JAN 2018 to 01 FEB 2018

SC-4, 04 JAN 2018 to 01 FEB 2018