WAAS	APP CRS	Rwy Idg	5002
CH 99707	005°	TDZE	979
W36A		Apt Elev	979

RNAV (GPS) RWY 36
WINCHESTER MUNI (BGF)

T A NA — DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 54° C (130°F). Baro-VNAV and LNAV NA when using Chattanooga altimeter setting. When local altimeter setting not received, use Chattanooga altimeter setting and increase LPV DA to 1503, LNAV/VNAV DA to 1530 and all MDA 160 feet. Increase LPV and LNAV/VNAV visibility ½ mile all Cats. Increase circling visibility ½ mile Cat C. VDP NA when using Chattanooga altimeter setting.

MISSED APPROACH: Climb to 4000 direct ZEDUX and hold.

AWOS-3	MEMPHIS CENTER	GCO	UNICOM
121.675	128.15 323.125	121.725	122.8 (CTAF)

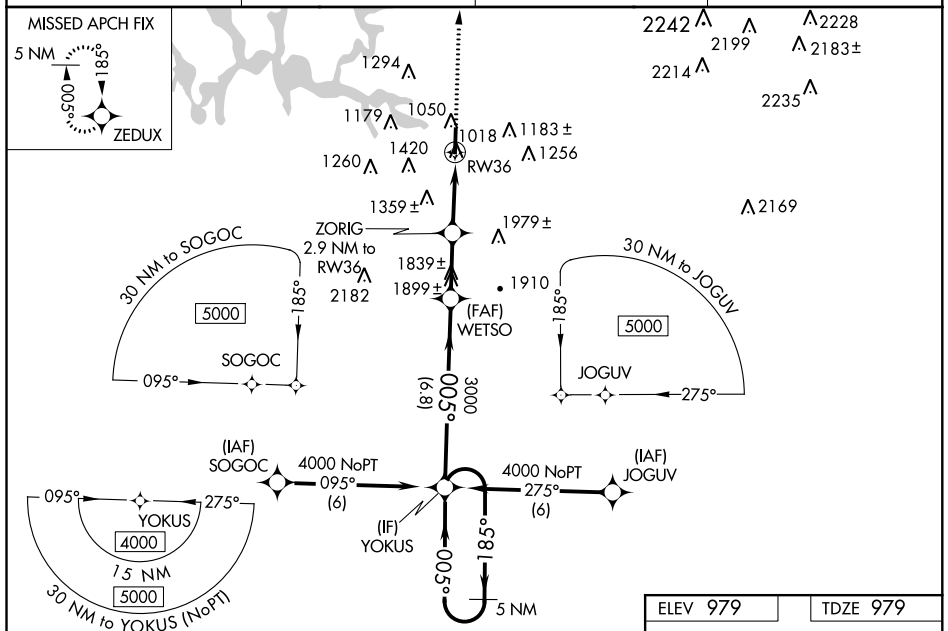

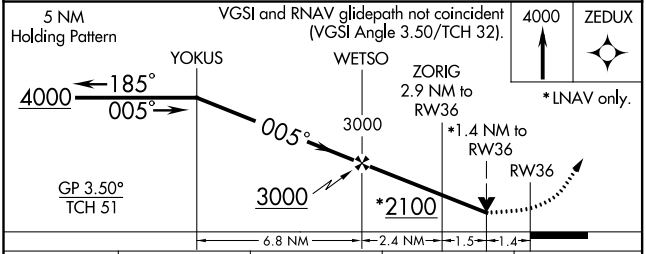

CATEGORY	A	B	C	D
LPV DA	1340-1 361 (400-1)			NA
LNAV/VNAV DA	1367-1¼ 388 (400-1¼)			NA
LNAV MDA	1540-1 561 (600-1)		1540-1½ 561 (600-1½)	NA
CIRCLING	1540-1 561 (600-1)		1540-1½ 561 (600-1½)	NA

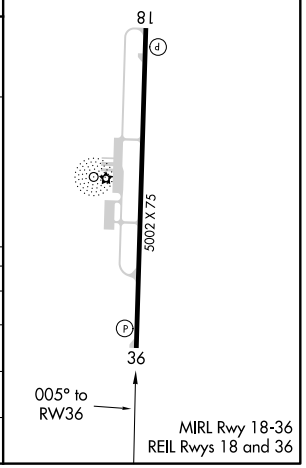

SE-1, 01 FEB 2018 to 01 MAR 2018
SE-1, 01 FEB 2018 to 01 MAR 2018