ILS or LOC Y RWY 6

NEW RIVER VALLEY (PSK)

LOC I-PSK	APP CRS	Rwy Idg	6201
110.9	058°	TDZE	2105
		Apt Elev	2105

V A NA — DME Required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet. Inoperative table does not apply to S-ILS 6 all Cats and S-LOC 6 Cats A and B. For inoperative MALSR, increase S-LOC 6 Cat C visibility to 1¼ mile.

MALSR (A5)

MISSED APPROACH: Climb to 3000 then climbing right turn to 5000 direct PSK VORTAC and hold.

AWOS-3	ROANOKE APP CON	ROANOKE CLNC DEL	UNICOM
127.375	126.0 339.8	121.7	122.7 (CTAF) L

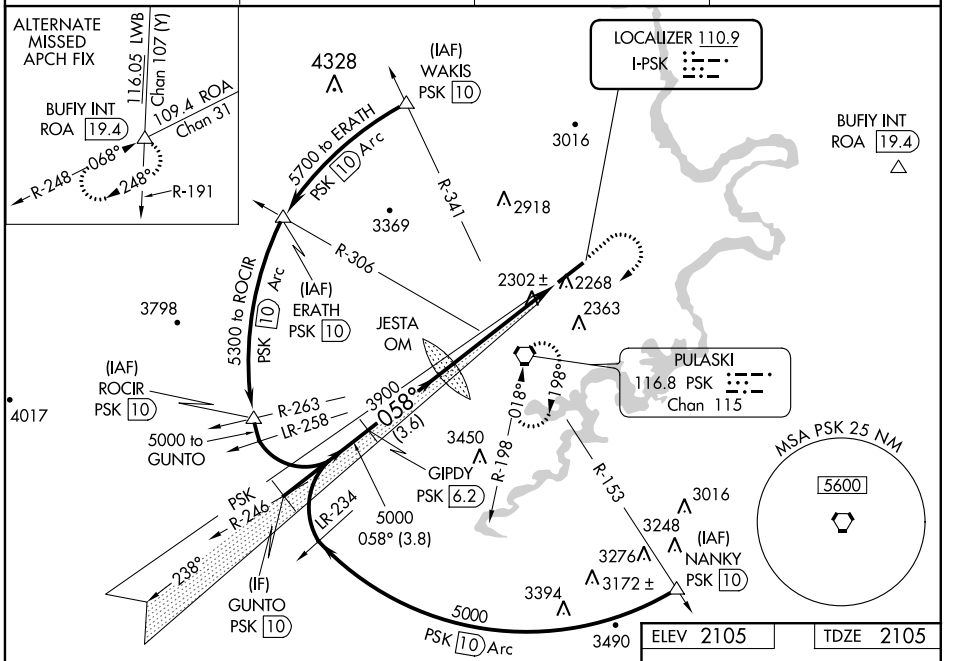

DME REQUIRED

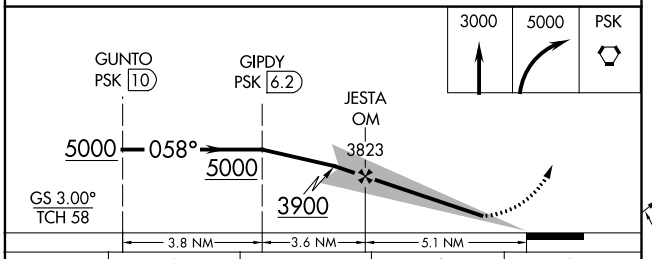

CATEGORY	A	B	C	D
S-ILS 6	2305-1 200 (200-1)			
S-LOC 6	2560-1 455 (500-1)			
CIRCLING	2620-1 515 (600-1)		2620-1½ 515 (600-1½)	2680-2 575 (600-2)

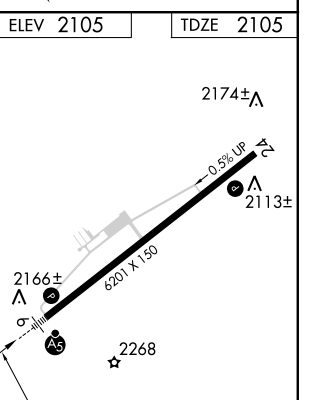

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NE-3, 26 APR 2018 to 24 MAY 2018
NE-3, 26 APR 2018 to 24 MAY 2018