RNAV (GPS) Y RWY 35L

LUBBOCK PRESTON SMITH INTL (LBB)

WAAS	APP CRS		
CH 50128	354°	Rwy Idg	11500
W35A		TDZE	3254
		Apt Elev	3282

Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 51°C (125°F). DME/DME RNP-0.3 NA. For inop ODALS, increase LNAV/VNAV visibility to 1⅜ mile all Cats, and LNAV visibility Cats C/D/E to 1⅝ mile.

ODALS

MISSED APPROACH: Climb to 5400 direct TUDPY and hold.

ATIS	LUBBOCK APP CON	LUBBOCK TOWER	GND CON	CLNC DEL
125.3	119.2 351.8	120.5 239.3	121.9 348.6	125.8 281.55

MISSED APCH FIX

7 NM 174° 354° TUDPY

RW35L

3360 3390

3518

4043 3570 (FAF) UFACI 3790

4015

4146 4089

4157 (6.3) 354° 4700

Procedure NA for arrivals at RALLS on V102 eastbound.

RALLS

5200 217° (21.3)

(IAF) OGHUS

5200 084° (10.3)

(IF) ZOVOC

5200 264° (10)

(IAF) EMUMY

5200 061° (18.2)

MANIC

Procedure NA for arrivals at MANIC on V102 southwest bound.

MSA RW35L 25 NM

5300

SC-2, 24 MAY 2018 to 21 JUN 2018

SC-2, 24 MAY 2018 to 21 JUN 2018

ELEV 3282 D TDZE 3254

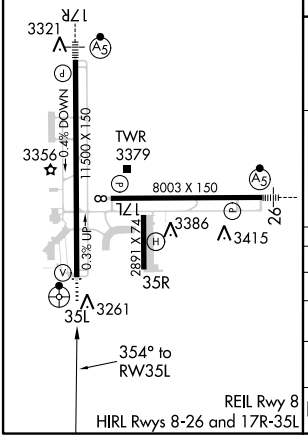

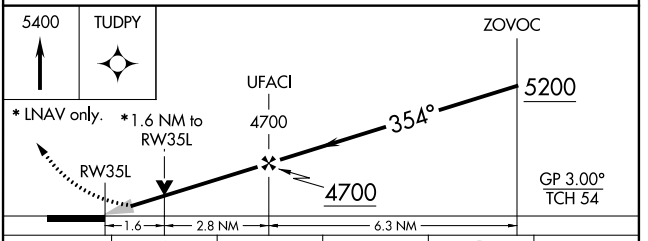

CATEGORY	A	B	C	D	E
LPV DA	3454-¾ 200 (200-¾)				
LNAV/VNAV DA	3673-1¼ 419 (400-1¼)				
LNAV MDA	3820-¾ 566 (600-¾)		3820-1½ 566 (600-1½)		
C CIRCLING	3820-1 538 (600-1)		3880-1⅝ 598 (600-1⅝)	3940-2 658 (700-2)	4100-3 818 (900-2)