RNAV (GPS) RWY 7

ALBERT WHITTED (SPG)

APP CRS	Rwy Idg	2919
067°	TDZE	7
	Apt Elev	7

Night landing: Rwy 36 NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase all MDA 40 feet, LNAV Cat C visibility ⅛ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing right turn 2000 direct PHIEL and hold.

ASOS	TAMPA APP CON	ALBERT WHITTED TOWER★	GND CON	UNICOM
118.875	119.65 316.05 (EAST) 125.3 316.05 (WEST)	127.4 (CTAF) L 257.6	121.8	122.95

Procedure NA for arrivals at SRQ VOR/DME on Q100 eastbound, and arrivals at PIE VORTAC on V35 northwest bound.

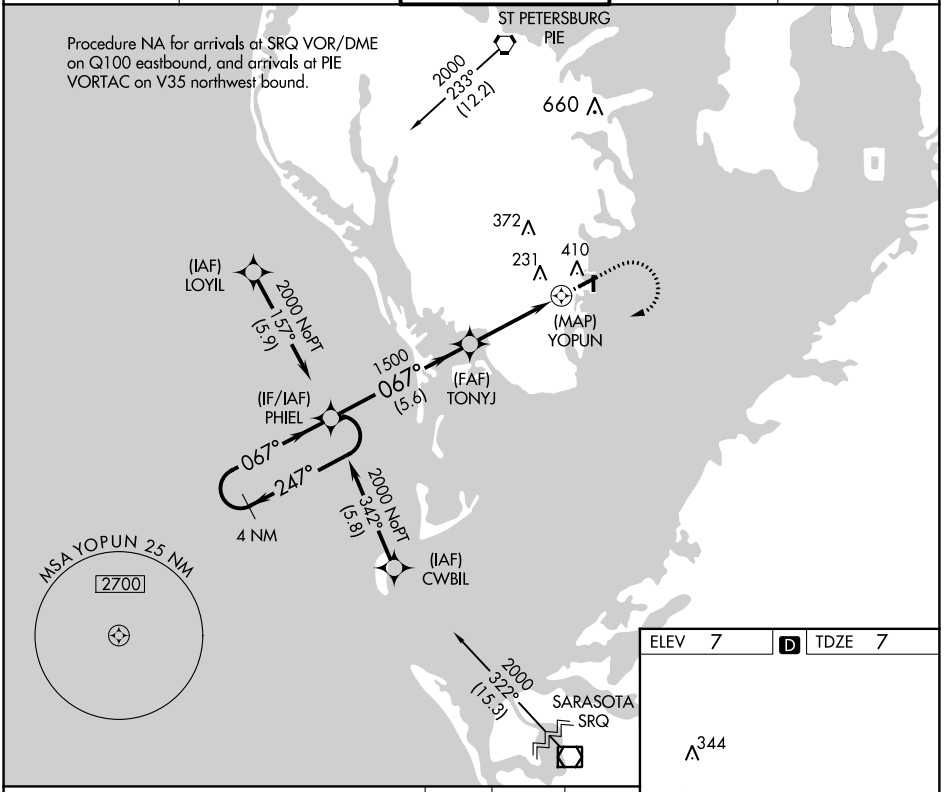

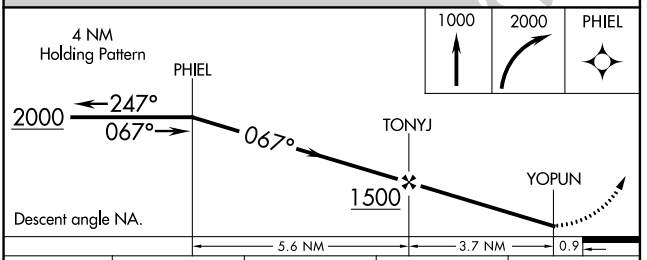

CATEGORY	A	B	C	D
LNAV MDA	660-1	653 (700-1)	660-1⅞ 653 (700-1⅞)	NA
CIRCLING	720-1	713 (800-1)	720-2 713 (800-2)	NA

ELEV 7 D TDZE 7



MIRL Rwys 7-25 and 18-36 L
REIL Rwys 7, 18, 25 and 36 L

SE-3, 24 MAY 2018 to 21 JUN 2018
SE-3, 24 MAY 2018 to 21 JUN 2018