APP CRS	Rwy Idg	4003
148°	TDZE	47
	Apt Elev	72

RNAV (GPS) RWY 15

EASTON/NEWNAM FIELD (ESN)

DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Baltimore-Washington Intl Thurgood Marshall altimeter setting and increase all MDAs 100 feet, LNAV Cats C and D visibility ¼ mile, Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. Night landing: Rwy 15, 33 NA.

MISSED APPROACH: Climb to 2000 direct TUKIE and via 052° track to ORETE and hold.

ATIS	POTOMAC APP CON	EASTON TOWER ★	GND CON	CLNC DEL	UNICOM
124.475	133.75 254.35	118.525 (CTAF) L	119.075	119.075	122.95

RADAR REQUIRED

629

(IF) HIVAR

1600 147° (6.1)

(FAF) CERAV

148°

163±

RW15

227

119° ORETE

299°

4 NM

290

389

052°

TUKIE

R-4006

MSA RW15 25 NM

2100

ELEV 72 D TDZE 47

148° to RW15

12

22

0.5% UP

4003 X 100

5500 X 100

TWR

33

0.7% UP

4

139

HIRL Rwy 4-22 L

REIL Rwys 22, 15 and 33 L

MIRL Rwys 15-33 L

VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 45).

2000	TUKIE	052° tr	ORETE

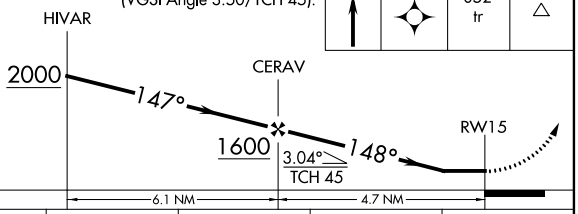

CATEGORY	A	B	C	D
LNAV MDA	420-1 373 (400-1)			420-1¼ 373 (400-1¼)
CIRCLING	480-1 408 (500-1)	540-1 468 (500-1)	660-1½ 588 (600-1½)	660-2 588 (600-2)

NE-3, 24 MAY 2018 to 21 JUN 2018
NE-3, 24 MAY 2018 to 21 JUN 2018