


LOC I-ONP 111.5	APP CRS 162°	Rwy ldg TDZE Apt Elev	5398 152 160
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 16


NEWPORT MUNI (ONP)


⚠ Inop table does not apply to S-ILS Rwy 16, all Cats. DME required. VDP NA when using Tillamook altimeter setting. Rwy 16 helicopter visibility reduction below $\frac{3}{4}$ SM

⚠ NA NA. When local altimeter setting not received, use Tillamook altimeter setting; increase DA to 537 feet and all MDA 140 feet; increase S-LOC 16 Cat C/D visibility $\frac{3}{8}$ mile and increase Circling Cat B visibility $\frac{1}{4}$ mile. For inop MALSRL, increase S-LOC 16 Cat A/B visibility to 1 mile and Cat C/D visibility to $1\frac{3}{8}$ mile. For inop MALSRL when using Tillamook altimeter setting, increase S-ILS 16 all Cats visibility to $1\frac{1}{4}$ mile and increase S-LOC 16 Cat A/B visibility to 1 mile. DME from ONP VORTAC. Simultaneous reception of I-ONP and ONP DME required.

MALSRL 



MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on heading 020° and on ONP VORTAC R-343 to BUHRS/ONP 6.6 DME and hold, continue climb-in-hold to 3000.

AWOS-3 133.9	SEATTLE CENTER 125.8 291.7	UNICOM 122.8 (CTAF) 
------------------------	--------------------------------------	---

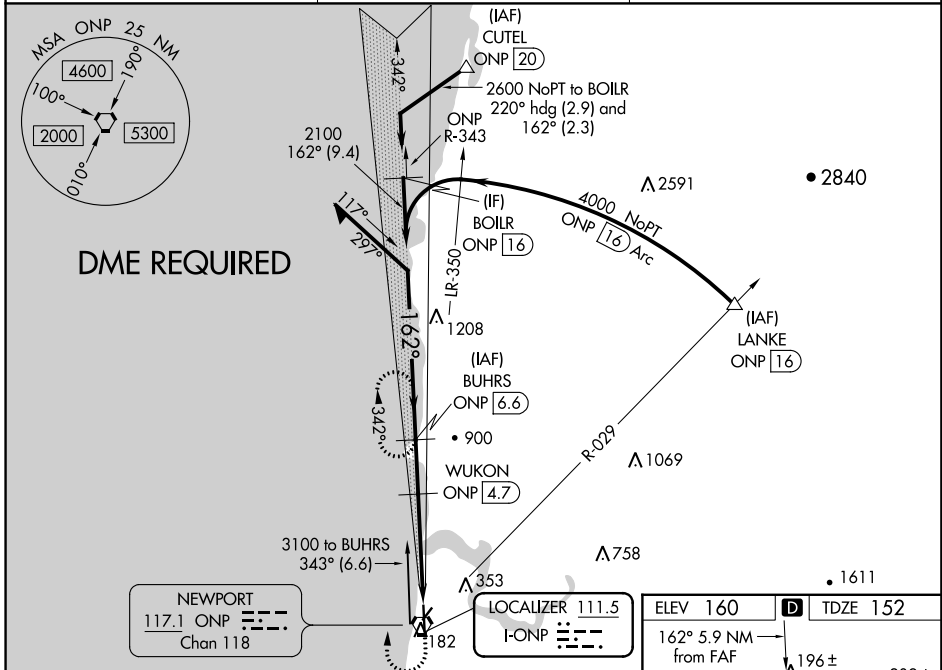

NW-1, 21 JUN 2018 to 19 JUL 2018

NW-1, 21 JUN 2018 to 19 JUL 2018

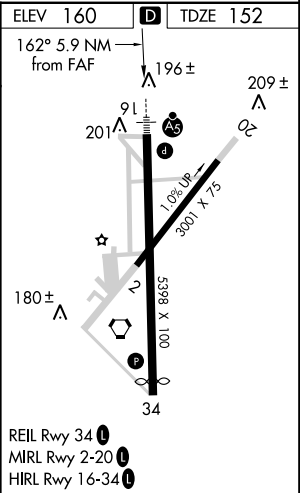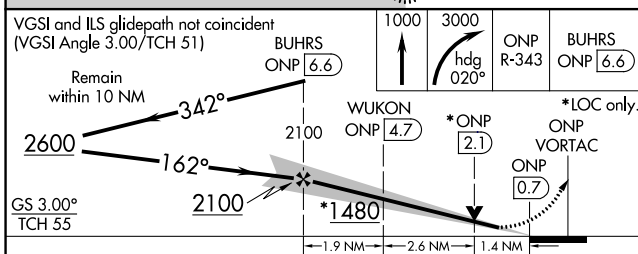

CATEGORY	A	B	C	D
S-ILS 16	402- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
S-LOC 16	660- $\frac{3}{4}$ 508 (500- $\frac{3}{4}$)	660-1 508 (500-1)		
C CIRCLING	880-1 720 (800-1)	1000-1 $\frac{1}{4}$ 840 (900-1 $\frac{1}{4}$)	1400-3 1240 (1300-3)	1600-3 1440 (1500-3)