VORTAC OSH	APP CRS	Rwy Idg	5648
111.8	265°	TDZE	786
Chan 55		Apt Elev	808

VOR RWY 27

WITTMAN RGNL (OSH)

T A Circling to Rwy 5, 23, and 31 NA at night. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase S-27 Cats C and D visibility ¼ mile and Circling Cat C visibility ⅛ mile, and Cat D ¼ mile. VDP NA with Fond Du Lac altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 on OSH VORTAC R-270 to GRATE INT/OSH 8.7 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	132.3	122.95

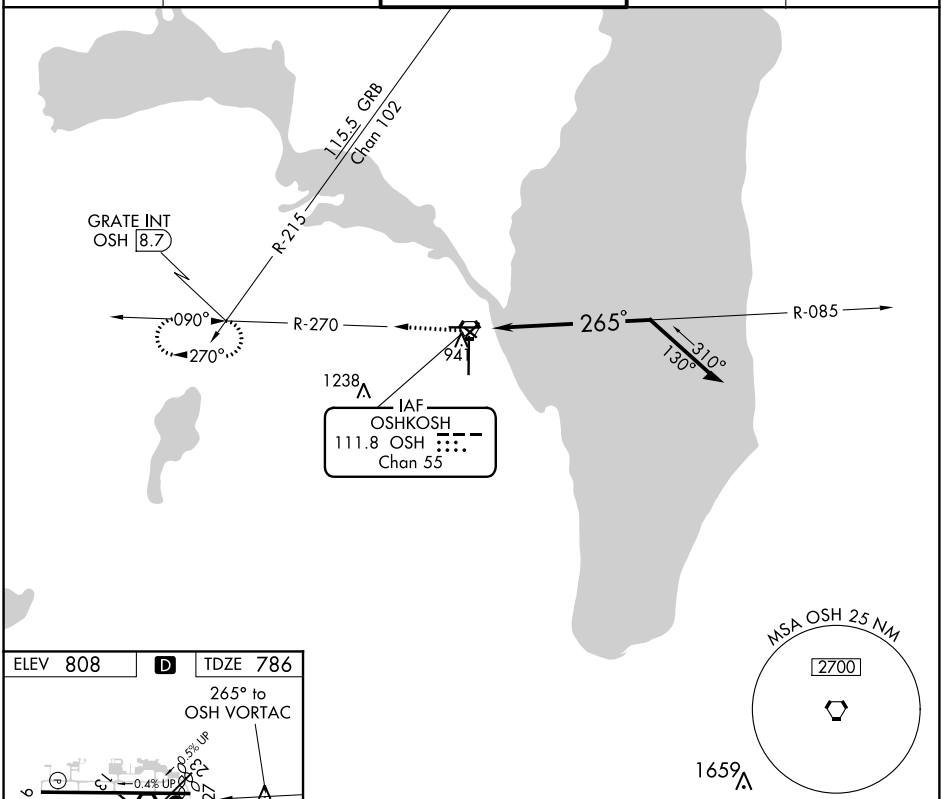

ELEV 808 D TDZE 786

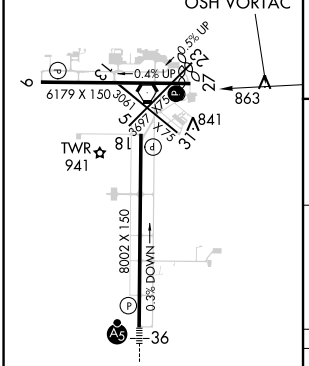

REIL Rwys 18 and 27
HIRL Rwys 9-27 and 18-36 L

3000
OSH R-270
GRATE INT

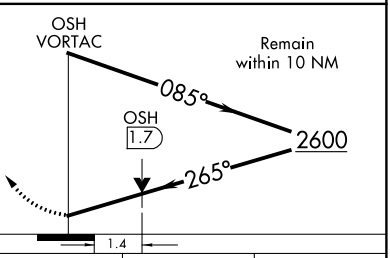

CATEGORY	A	B	C	D
S-27	1280-1 494 (500-1)		1280-1⅜ 494 (500-1⅜)	
C CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

EC-3, 11 OCT 2018 to 08 NOV 2018
EC-3, 11 OCT 2018 to 08 NOV 2018