


WAAS CH 82010 W05A	APP CRS 053°	Rwy Idg TDZE Apt Elev	8002 666 668
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 5

MBS INTL (MBS)

<p>▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.</p>				<p>MALSRL </p>		<p>MISSED APPROACH: Climb to 2300 direct FOROX and hold.</p>	
ATIS 125.925	SAGINAW APP CON* 050°-229° 230°-049°	120.95 235.625 126.45 235.625	SAGINAW TOWER* 120.1(CTAF) 0 257.7	GND CON 121.7	CLNC DEL 121.85	UNICOM 122.95	

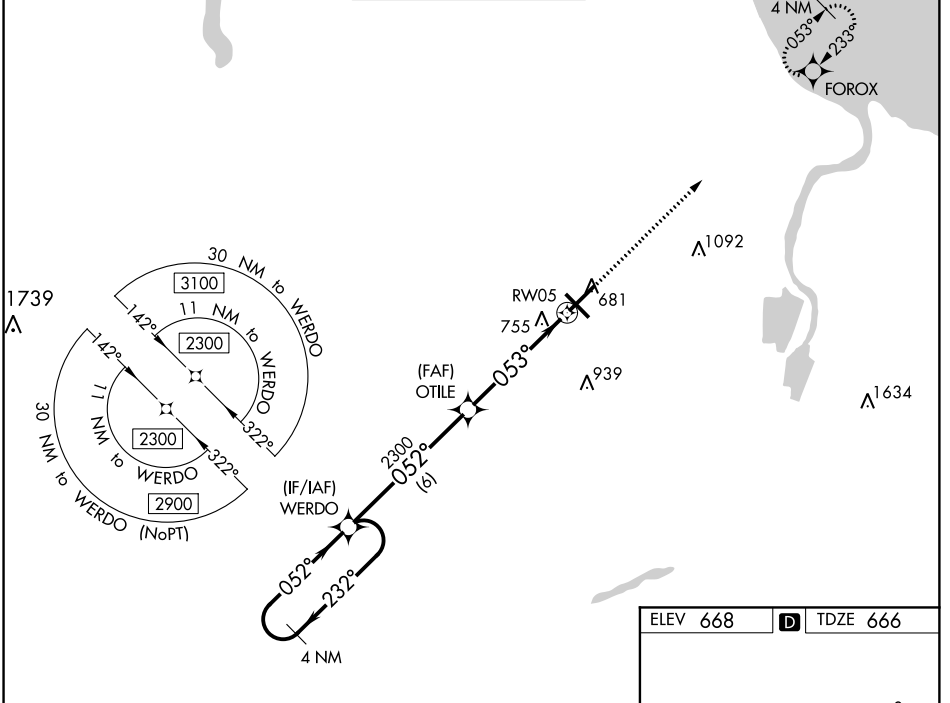

4 NM Holding Pattern		WERDO	OTILE	2300 FOROX
← 232°		→ 052°	→ 053°	* 1.1 NM to RW05
GP 3.00°		2300		* LNAV only.
TCH 50		6 NM	3.9 NM	1.1 NM
CATEGORY	A	B	C	D
LPV DA**		866/24	200 (200-½)	
LNAV/VNAV DA		955/24	289 (300-½)	
LNAV MDA	1080/24	414 (500-½)	1080/40	414 (500-¾)
C CIRCLING	1080-1 412 (500-1)	1120-1 452 (500-1)	1240-1½ 572 (600-1½)	1240-2 572 (600-2)

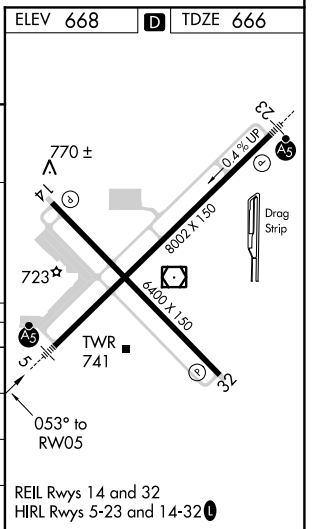

EC-1, 11 OCT 2018 to 08 NOV 2018

EC-1, 11 OCT 2018 to 08 NOV 2018