WAAS	APP CRS		
CH 86734	093°	Rwy Idg	5648
W09A		TDZE	797
		Apt Elev	808

RNAV (GPS) RWY 9

WITTMAN RGNL (OSH)

T A Circling to Rwy 5, 23, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with using Fond Du Lac County altimeter setting. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats visibility and LNAV Cats C/D visibility ⅛ mile, increase Circling Cat D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct PRIMO and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	121.9	122.95

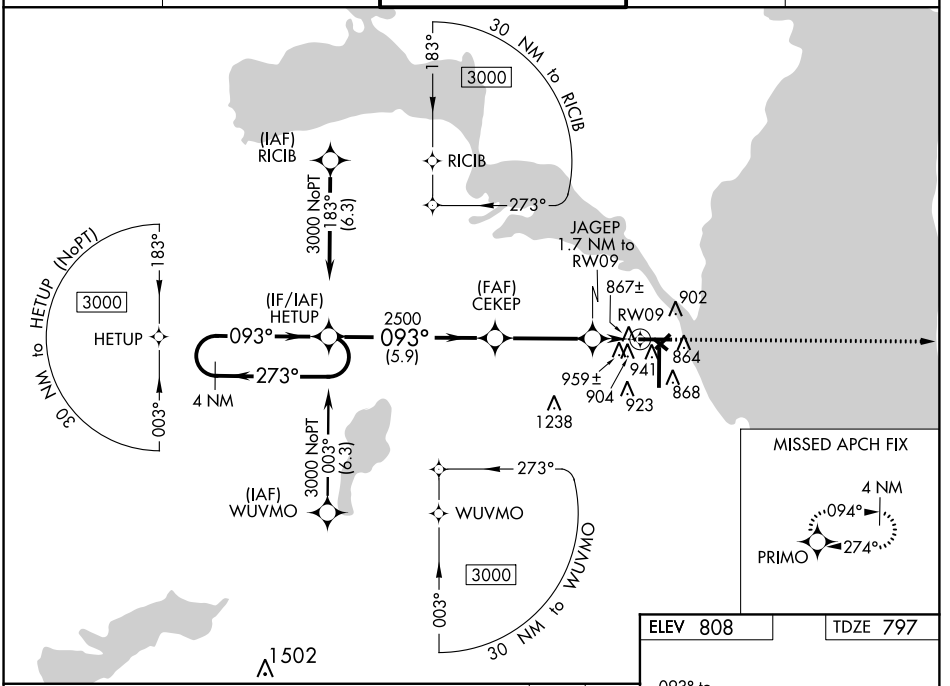

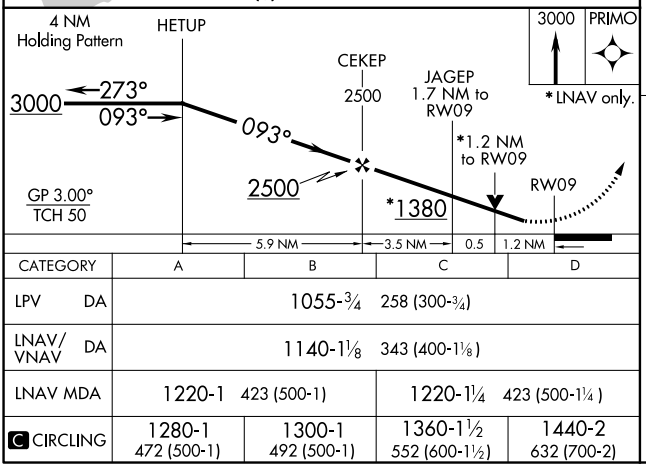

CATEGORY	A	B	C	D
LPV DA	1055-¾ 258 (300-¾)			
LNAV/VNAV DA	1140-1⅛ 343 (400-1⅛)			
LNAV MDA	1220-1 423 (500-1)		1220-1¼ 423 (500-1¼)	
C CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

ELEV 808 TDZE 797

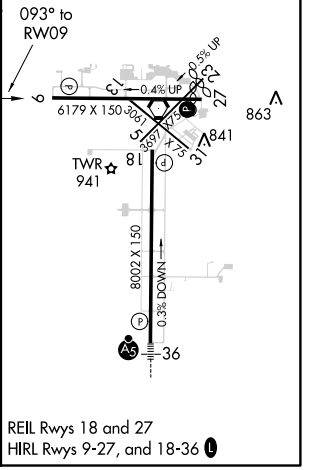

REIL Rwys 18 and 27
HIRL Rwys 9-27, and 18-36 L

EC-3, 07 DEC 2017 to 04 JAN 2018
EC-3, 07 DEC 2017 to 04 JAN 2018