

APP CRS	Rwy Idg	7001
094°	TDZE	76
	Apt Elev	76

RNAV (GPS) RWY 9


BROOKSVILLE-TAMPA BAY RGNL (BKV)

⚠ Baro-VNAV NA when using Tampa Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase all DA 77 feet and all MDA 80 feet, increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. For inop MALSRS increase LNAV Cat D visibility to 1 ¼ mile. Circling Rwy 3/21/27 NA at night.





MISSED APPROACH:
Climb to 2000 direct
AZBOG and hold.

ASOS 134.725	TAMPA APP CON 125.3 316.05	BROOKSVILLE TOWER ★ 118.55 (CTAF) 0	GND CON 121.4	CLNC DEL 119.125	UNICOM 123.0
------------------------	--------------------------------------	---	-------------------------	----------------------------	------------------------

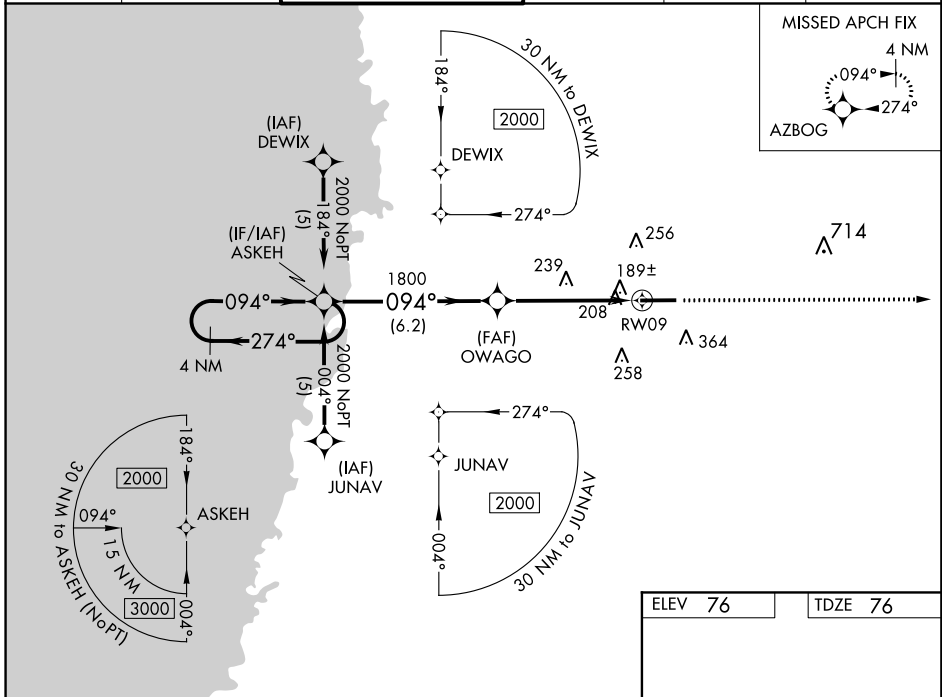

SE-3. 04 JAN 2018 to 01 FEB 2018

SE-3. 04 JAN 2018 to 01 FEB 2018

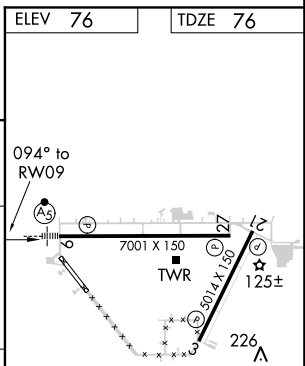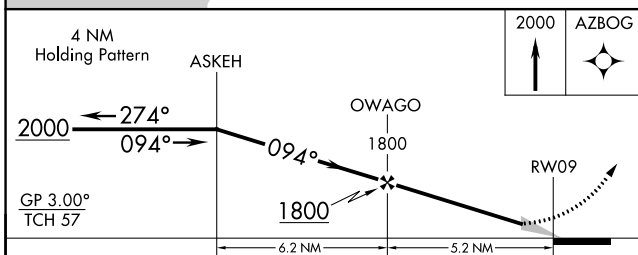

CATEGORY	A				B				C				D			
LNAV/VNAV DA	507-1				431 (500-1)				500-¾				500-1			
LNAV MDA	500-½		424 (500-½)		500-¾		424 (500-¾)		500-1		424 (500-1)		500-1		424 (500-1)	
CIRCLING	680-1		604 (700-1)		680-1¾		604 (700-1¾)		680-2		604 (700-2)		680-2		604 (700-2)	

MIRL Rwys 3-21 and 9-27