LOC/DME BC RWY 18

WITTMAN RGNL (OSH)

LOC I-OSH	APP CRS	Rwy Idg	8002
110.5	184°	TDZE	794
		Apt Elev	808

Simultaneous reception of I-OSH and OSH DME required. DME from OSH VORTAC. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase Circling Cat D visibility ¼ mile. Circling to Rwy 5, 23, and 31 NA at night. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 on OSH R-111 to LEWKO INT/OSH 15.1 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	121.9	122.95

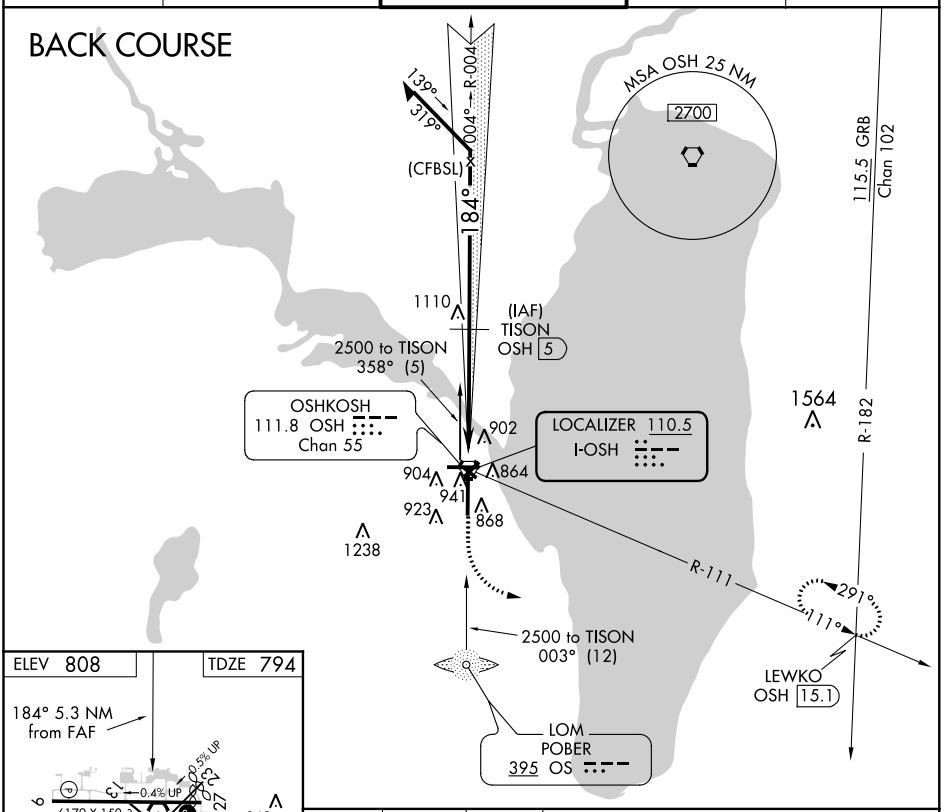

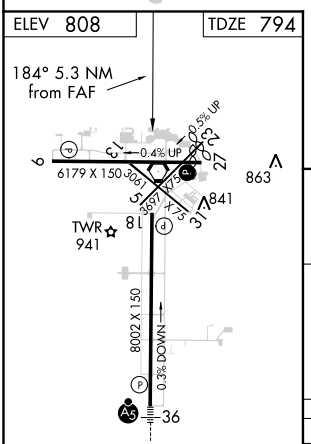

REIL Rwys 18 and 27
HIRL Rwys 9-27 and 18-36 L

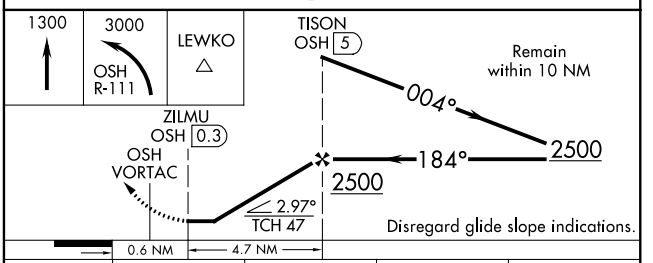

CATEGORY	A	B	C	D
S-18	1240-1	446 (500-1)	1240-1⅜	446 (500-1⅜)
C CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

EC-3, 01 MAR 2018 to 29 MAR 2018
EC-3, 01 MAR 2018 to 29 MAR 2018